
MODELING OF A TURBULENT ETHYLENE/AIR JET FLAME USING HYBRID FINITE VOLUME/MONTE CARLO METHODS

**Ranjan S. Mehta,¹ Anquan Wang,² Michael F. Modest,¹
and Daniel C. Haworth¹**

¹Department of Mechanical and Nuclear Engineering, The Pennsylvania State University, University Park, Pennsylvania 16802, USA; ²GE Global Research Center, One Research Circle, Niskayuna, NY 12309, USA

Detailed modeling of an experimental ethylene/air jet flame is undertaken using the composition PDF method for gas-phase kinetics coupled with detailed models for soot formation and radiation from the flames. The gas-phase kinetics is modeled using a reduced mechanism for ethylene consisting of 33 species and 205 elementary reactions. The soot formation is modeled using the method of moments with a simplified nucleation mechanism and modified surface-HACA mechanism for surface growth and oxidation. The soot formation is coupled directly with a transported PDF approach to account for turbulence–chemistry interactions in gas-phase chemistry and the highly nonlinear soot formation processes. Radiation from soot and combustion gases is accounted for by using a photon Monte Carlo method coupled with nongray properties for soot and gases. Soot particles are assumed to be small, and scattering effects are neglected. Turbulence–radiation interactions are captured accurately. Simulation results are compared to experimental data, and also with less CPU-intensive radiation calculations using the optically thin approximation.

INTRODUCTION

Radiation is a dominant mode of heat transfer in many combustion systems. In numerical simulations, accurate treatment of radiative heat transfer is essential to predict flame structure correctly, which includes temperature, species and particulate matter (soot) distributions inside the flames. Most combustion devices operate in turbulent flow conditions, where turbulence–chemistry interactions (TCI) arise due to highly nonlinear coupling between temperature, species mass fractions and reaction kinetics. Much effort has been dedicated to accurately predict TCI, which remains the main goal of turbulent combustion modeling (Veynante and Vervisch, 2002). Turbulence–radiation interactions (TRI) arise from the highly nonlinear coupling between temperature and composition fluctuations, which cause fluctuations in radiative intensity. The effects of TRI can be comparable to those of TCI in both luminous and nonluminous flames (Cox, 1977; Song and Viskanta, 1987; Faeth et al., 1989).

Correspondence concerning this article should be addressed to Anquan Wang, GE Global Research Center, One Research Circle, Niskayuna, NY 12309, USA; e-mail:mfm@engr.psu.edu.

TRI has started to receive attention in recent years (Song and Viskanta, 1987; Li and Modest, 2002; Coelho, 2007). It has been shown that accounting for TRI can increase radiative losses from a flame by more than a factor of 2 (Faeth et al., 1989; Li and Modest, 2002) even in nonluminous flames. Advances have been made in accurately capturing TRI in reacting flows using transported PDF methods (Mazumder and Modest, 1999; Li and Modest, 2002; Tessé, et al., 2004; Wang and Modest, 2007b). Recently, Wang and Modest (2007b) developed an advanced Photon Monte Carlo method for spectral radiative calculations, applied to reacting, and nonreacting flows. The method uses accurate line-by-line absorption coefficients for combustion gases, such as CO₂ and H₂O, and has been extended to include nongray radiation due to soot. This method allows capture of TRI arising from correlations between absorption coefficient and local Planck function (emission TRI) and also between absorption coefficient and incident radiation (absorption TRI).

PHYSICAL AND NUMERICAL MODELS

Gas-Phase Kinetics

A systematically reduced 33 species ethylene mechanism containing 205 elementary reactions is used to model gas-phase kinetics (Law, 2005). The molecular transport properties and thermochemistry have been implemented using TRANSPORT (Kee et al., 1986) and CHEMKIN-II (Kee et al., 1989), respectively, and interfaced seamlessly with the underlying CFD code (Zhang and Haworth, 2004).

Soot Model

Soot emission can dominate gas radiation by more than a factor of 10 when soot is present at part-per-million levels (Modest, 2003). It has been shown that, in the presence of soot, peak temperatures can drop by more than 300 K due to soot radiation (Bandaru, 2000). Thus, accurate prediction of soot levels is essential when modeling sooting flames. In addition, the temperature field affects kinetic rates of most gas-phase reactions and soot subprocesses, thereby changing the flame structure significantly.

Detailed and semidetailed soot models generally have two parts: (i) soot kinetics (interaction between soot particles and the surrounding gas-phase species) that includes nucleation, surface growth, and oxidation models; and (ii) soot-particle dynamics (interaction between the soot particles), which includes coagulation and aggregation. The soot particle dynamics can be treated in different ways. These include the method of moments where one solves for the moments of the particle-size distribution function (PSDF) (Frenklach, 2002), or sectional methods (McEnally et al., 1998), where the PSDF is divided into discrete sections by average particle size. Here a method of moments with interpolative closure has been used. Three to six moments have been

found to be sufficient in previous modeling studies of laminar premixed flames (Frenklach and Wang, 1994; Appel et al., 2000) and opposed-flow diffusion flames (Wang et al., 1996). The method of moments can be extended to aggregation of soot particles into mass fractals (Kazakov and Frenklach, 1998). Because the current study is limited to atmospheric-pressure flames, it is expected that soot particles will remain primarily spheroidal; hence, aggregation is not considered.

Soot kinetics: Soot formation is a complex process and can be divided into several subprocesses: (i) nucleation of soot particles, when they acquire characteristics different from the gas-phase; (ii) surface growth/oxidation of soot particles due to reactions with the gas-phase; and (iii) particle coagulation/aggregation due to collisions with each other. All these processes occur simultaneously and need to be modeled accurately (Bockhorn, 1994). Much research has been done in past decades on the nature of soot nucleation, and many models have been put forth (Kennedy, 1997). It is generally accepted that soot particles are nucleated after formation of large polycyclic aromatic hydrocarbon (PAH) molecules. However, nucleation models based on large molecules require these to be included in the gas-phase thermochemistry (Frenklach and Wang, 1994), resulting in large gas-phase mechanisms containing hundreds of species (Appel et al., 2000). These large mechanisms are computationally prohibitive for simulating turbulent flames, and alternative models are of interest. In the case of nonpremixed flames burning in atmospheric conditions, it has been observed that most contributions to soot mass are due to surface reactions and are relatively insensitive to nucleation models (Leung et al., 1991; Mehta et al., 2008). Here a simplified nucleation mechanism based on local acetylene (C_2H_2) concentration proposed by Leung et al., (1991) has been used; this has been shown to work well in turbulent flames as well (Lindstedt and Louloudi, 2005, Mehta et al., 2007).

Soot surface growth models have been an active area of research for several decades (Kennedy, 1997). Frenklach and Wang (1991, 1994) proposed chemical similarity, which postulates that chemical reactions taking place on the soot particle surface are analogous to those for large PAH molecules (Frenklach and Wang, 1991). The surface-HACA mechanism is consistent with the findings of Harris and Weiner (1985), who determined that acetylene dominates surface growth in their flames. Soot surface oxidation is due to attack by OH radicals and oxygen (Neoh et al., 1981). Here the surface-HACA mechanism has been used (Frenklach and Wang, 1994). The key reactions involved in surface growth/oxidation of soot particles are listed in Table 1.

In Table 1, \rightarrow indicates an irreversible reaction and \rightleftharpoons denotes a reversible reaction, C_s denotes a soot particle and C_s^* is a soot radical. The kinetic rate coefficients for each of the reactions and other details can be found in the references listed in the table.

Soot particle dynamics: The time evolution of a particle ensemble is described by population balance equations known as the “Smoluchowski master equations” (Fuchs, 1989; Seinfeld and Pandis, 1998). These can be written as,

Table 1. Surface growth mechanism

No.	Reaction	References
1	$C_s + H \rightleftharpoons C_s^* + H_2$	Frenklach and Wang, 1994; Appel et al., 2000
2	$C_s + OH \rightleftharpoons C_s^* + H_2O$	Frenklach and Wang, 1994; Appel et al., 2000
3	$C_s^* + H \rightarrow C_s$	Frenklach and Wang, 1994
4A	$C_s + C_2H_2 \rightarrow C_s + H$	Frenklach and Wang, 1994
4B	$C_s + C_2H_2 \rightarrow C_s^* + H$	Wang et al., 1996
5	$C_s^* + O_2 \rightarrow 2CO + \text{products}$	Frenklach and Wang, 1994
6	$C_s + OH \rightarrow CO + \text{products}$	Neoh et al., 1981; Frenklach and Wang, 1994

$$\frac{\partial N_1}{\partial t} = - \sum_{j=1}^{\infty} \beta_{1,j} N_1 N_j \quad (1a)$$

$$\frac{\partial N_i}{\partial t} = \frac{1}{2} \sum_{j=1}^{i-1} \beta_{j,i-j} N_j N_{i-j} - \sum_{j=1}^{\infty} \beta_{i,j} N_i N_j \quad i = 2 \dots \infty \quad (1b)$$

Where N_i denotes the number of particles of size i per unit volume (i.e., size i particle number density). N_1 is the number density of the smallest particles, and $\beta_{i,j}$ is the collision coefficient between particles of size i and j . In general, then, $\beta_{i,j} = \beta_{i,j}(N_i, N_j, m_i, m_j)$, where m_i is the mass of particle of size i . The concentration moment of the particle number density function N_i is

$$M_r = \sum_{i=1}^{\infty} m_i^r N_i \quad (2)$$

It can be seen that if $r = 0$, then $M_0 = \sum_{i=1}^{\infty} N_i$ is the total particle number density. For $r = 1$, $M_1 = \sum_{i=1}^{\infty} m_i N_i$ is the total mass of particles per unit volume, so that the volume fraction is given by $f_v = M_1 / \rho_s$, where ρ_s is the density of soot particles. Higher order moments may lack a simple physical interpretation but are needed for accuracy. It can be seen that knowledge of all integer moments ($r = 0, \dots, \infty$) is equivalent to knowledge of the size distribution function itself. However, most of the principal properties for the particle ensemble can be deduced from the first few moments.

Nucleation, surface growth, and particle coagulation equations are then cast in those for the moments of the PSDF in the following form:

$$t = R_r + G_r + W_r \quad r = 0, 1, \dots, M_{\max} \quad (3)$$

where R_r is source due to nucleation, G_r due to coagulation, W_r due to surface reactions, and M_{\max} is the number of moments retained in the formulation. Unclosed terms appearing in these equations are closed using an interpolative closure whose details can

be found in Frenklach (2002). Here, $M_{\max} = 5$ is used and expected to suffice. At higher pressures, soot coagulation results in formation of mass fractals that have geometries far from spheroidal (Kazakov and Frenklach, 1998). However, because the current study is limited to atmospheric-pressure flames, it is expected that soot particles will stay mainly small and spheroidal. This assumption was found to be sufficient in turbulent flames simulated by Lindstedt and Louloudi (2005). Soot coagulation is considered in free-molecular, continuum, and transition regimes. The surface reaction rate due to gaseous species (growth or oxidation) for a soot moment r can be written as

$$W_r^{\text{surf}} = k_{\text{sg}} C_g \alpha \chi_s M_0 \sum_{k=0}^{r-1} \binom{r}{k} \Delta m^{r-k} \mu_{r+2/3} \quad (4)$$

where k_{sg} is the kinetic rate coefficient for reaction with gas g , C_g is the molar concentration of the gas species, α is a steric factor, χ_s is the nominal number density of surface radical sites, Δm is the change in soot mass due to the reaction (Frenklach and Wang, 1994), and μ_p is the reduced soot moment. The factor α is the fraction of the surface sites available for chemical reactions; it was introduced by Frenklach and Wang (1991) to account for differences in soot surface growth rates with temperature as a result of structural changes. The functional form for α has evolved from constant values (Frenklach and Wang, 1994; Colket and Hall, 1994) to a temperature-dependent expression used by Appel et al., (2000). Here $\alpha = \alpha_{\text{ABF00}}$, corresponding to the functional form introduced by Appel, Bockhorn, and Frenklach (Appel et al., 2000) has been used. The authors are not aware of previous application of α_{ABF00} to turbulent diffusion flames.

Radiation Models

In low-Mach-number flows, radiation does not alter conservation of mass, momentum, and species conservation. However, the energy (absolute enthalpy) equation is modified by the presence of a radiative source term,

$$\frac{\partial \rho h}{\partial t} + \frac{\partial \rho h u_i}{\partial x_i} = -\frac{\partial J_i^h}{\partial x_i} + \frac{Dp}{Dt} + \tau_{ij} \frac{\partial u_j}{\partial x_i} + S_{\text{radiation}} \quad (5)$$

where h is the absolute enthalpy, J_i^h denotes the molecular transport of enthalpy, and $S_{\text{radiation}}$ is the radiative source term interpreted as the local net volumetric gain of thermal energy due to both emission and absorption, and can be expressed as (Modest, 2003)

$$S_{\text{radiation}} = -\nabla \cdot \underline{q}^R = \int_0^\infty \kappa_\eta \left(\int_{4\pi} I_\eta d\Omega - 4\pi I_{b\eta} \right) d\eta \quad (6)$$

where \underline{q}^R is the radiative flux, $\kappa_\eta = \kappa_\eta(\underline{Y}, T, p)$, is the spectral absorption coefficient of the radiating medium (mixture), which may be a function of temperature T and species

concentrations (expressed as mass fractions) of the radiating medium \underline{Y} . I_η is the spectral radiative intensity, and $I_{b\eta}$ is the Planck function or spectral blackbody intensity. The subscript η denotes spectral dependence and, Ω is the solid angle.

Radiation heat transfer plays a dominant role in most industrial flames and is governed by a complex integrodifferential equation in five dimensions (Modest, 2003). In addition, the spectral behavior of the absorption coefficient of the medium depends on its composition and local concentrations of selectively absorbing/emitting combustion gases (such as water vapor and carbon dioxide) and particulate matter (such as soot).

The simplest approximation for the radiative source term is the so-called optically thin assumption, in which local reabsorption of radiation is neglected and spectrally integrated absorption coefficients can be used for gases and soot, resulting in a simplified expression for the radiative source term given by

$$S_{\text{radiation}} = \left(\sum_{i=1}^{i=N_{\text{gas}}} k_{p,i} P_i + k_{p,\text{soot}} \right) 4\sigma_{SB} (T^4 - T_{\text{surr}}^4) \quad (7)$$

where $k_{p,i}$ is the Planck-mean absorption coefficient of radiating gases such as H₂O and CO₂, in metero per bar, P_i is the partial pressure of species i (in bar), and $k_{p,\text{soot}}$ is the Planck-mean absorption coefficient of soot. Here we use Planck-mean, ($k_{p,\text{soot}}$), and $\kappa_{\text{soot},\eta}$ spectral values based on Rayleigh theory (Modest, 2003), assuming small particles, and a complex index of refraction based on Chang and Charalampopoulos (1990). $T_{\text{surr}} = 300$ K is used in the modeling.

For a more accurate evaluation of the radiative source term, it is necessary to solve the nongray RTE, which has been done with various methods, including: (i) the spherical harmonics method or a variation of it (Mazumder and Modest, 1999; Li and Modest, 2002); (ii) the discrete ordinates method (finite volume method) (Coelho et al., 2003), and (iii) variants based on the photon Monte Carlo (PMC) method (Tessé et al., 2004; Snegirev, 2004; Wang and Modest, 2007a). One powerful feature of the PMC method is that it can handle problems of high complexity with relative ease.

For a variety of combustion applications, where joint probability-density-function (PDF) methods (Pope, 1985) are used, the medium is represented by notional particles evolving with time and traditional Monte Carlo ray-tracing schemes developed for continuous media are no longer useful for such stochastic media. Wang and Modest (2006) developed several emission and absorption schemes for media represented by discrete particles. The method was extended to achieve line-by-line accuracy in radiative property calculations with little increase in computational cost (Wang and Modest, 2007b). The PMC simulates the process of emitting radiation by releasing representative photon bundles (rays) in random directions, which are traced until they are absorbed (completely) at certain points in the medium or escape from the domain. An energy-partitioning scheme is utilized that reduces statistical error, compared to standard Monte Carlo (Modest, 2003).

In media represented by discrete particles, the ray energy is distributed over all the particles that the ray interacts with, if the energy-partitioning method is employed (Wang and Modest, 2006).

Turbulent Closure

Transported PDF methods have been developed over the past few decades for reacting as well as nonreacting turbulent flows through the work of several researchers [see Pope (1985), and references therein]. Composition PDF methods are a class of transported PDF methods, where physical scalars including temperature (or absolute enthalpy) and species concentrations are treated as random variables.

The joint PDF of these is then a function of spatial location \underline{x} and time t , whose transport equation can be derived (Pope, 1985) and takes the form

$$\begin{aligned} \frac{\partial \mathcal{F}}{\partial t} + \frac{\partial}{\partial x_i} [\tilde{u}_i \mathcal{F}] + \frac{\partial}{\partial \psi_\alpha} [S_{\alpha, \text{reac}}(\underline{\psi}) \mathcal{F}] = & - \frac{\partial}{\partial x_i} \left[\langle u_i'' | \underline{\psi} \rangle \mathcal{F} \right] + \frac{\partial}{\partial \psi_\alpha} \left[\left\langle \frac{1}{\rho} \frac{\partial J_i^\alpha}{\partial x_i} | \underline{\psi} \right\rangle \mathcal{F} \right] \\ & - \frac{\partial}{\partial \psi_\alpha} [S_{\alpha, \text{rad}}(\underline{\psi}) \mathcal{F}] \end{aligned} \quad (8)$$

In Eq. (8), summation is implied over repeated indices i and α within the terms with i and α representing physical and composition space, respectively. The notation $\langle A|B \rangle$ denotes the conditional probability of event A given that B occurs. The first two terms in Eq. (8) are transport of the mass density function \mathcal{F} transported with the Favre-averaged mean flow. The third term is flux in composition space due to sources that depend only on *local* composition (e.g., chemical reaction rates and radiative emission). This equation also shows that, no matter how nonlinear these sources are, they can be represented exactly. Terms on the right-hand side must be modeled. The first two terms represent transport in physical space due to turbulent diffusion and transport in composition space due to molecular-level mixing. Turbulent diffusion is commonly modeled based on the gradient-diffusion hypothesis as

$$\langle u_i'' | \underline{\psi} \rangle \mathcal{F} \simeq \Gamma_t \frac{\partial \mathcal{F}}{\partial x_i} \quad (9)$$

The turbulent diffusivity Γ_t is estimated by an ad hoc relationship that is derived from dimensional analysis and other considerations (Pope, 1985), so that

$$\Gamma_t = \frac{C_\mu \langle \rho \rangle \sigma_\phi k^2}{\epsilon} = \mu_T \sigma_\phi \quad (10)$$

where μ_T and σ_ϕ are, respectively, the modeled turbulent diffusivity (e.g., obtained from the standard two-equation k - ϵ model) and a turbulent Schmidt or Prandtl number.

Various mixing models have been used to model the second term on the right-hand side of Eq. (8). In the current work, the Euclidean minimum spanning tree (EMST) model by Subramaniam and Pope (1998) is used, which has been shown to perform better than other popular models in nonpremixed combustion. In principle, the PDF transport Eq. (8) can be solved by traditional finite-volume and finite-element methods. This approach was used by Janicka et al. (1978) for a jet diffusion flame. In general, however, the PDF is a function of a large number of independent variables, which makes it prohibitively expensive to use standard finite volume methods (FVM) and finite element methods (FEM). Monte Carlo approaches to the solution of the PDF equation have therefore been developed (Pope, 1985). The basic idea is to represent the PDF by a sufficiently large number of notional fluid particles. The mean quantities at any point in the domain are then calculated as an ensemble average over the particles in a sufficiently small neighborhood. In principle, the particle tracking method is grid free; however, in general, a grid is required to extract the statistics of the scalars at discrete locations. The algorithm presented here was developed by Pope and coworkers (Pope, 1985; Muradoglu et al., 1999; Jenny et al., 2001) and by Subramaniam and Haworth (2000). An algorithm developed by Zhang and Haworth (2004) to ensure consistency between the values obtained by a FV solution and Monte Carlo solution is also implemented. All use a coupled flow solver to provide information about the velocity field. The numerical methods have been analyzed for different types of errors by Pope and coworkers (Xu and Pope, 1999; Muradoglu et al., 2001).

The third term on the right-hand side of Eq. (8) is due to radiative transfer (i.e., the difference between energy gain due absorption of incident radiation and energy loss due to local emission),

$$S_{\text{rad}} = \int_0^{\infty} \kappa_{\eta} (G_{\eta} - I_{b,\eta}) d\eta, \quad G_{\eta} = \int_{4\pi} I_{\eta} d\Omega \quad (11)$$

where κ_{η} is the local spectral absorption coefficient, $I_{b,\eta}$ is the local (spectral) blackbody intensity, and G_{η} is the incident radiative intensity integrated over all directions. Both κ_{η} and $I_{b,\eta}$ are functions of local composition variables only, and therefore, local emission can be evaluated exactly using composition PDF methods. In contrast, G_{η} depends on properties at every (other) point in the domain and one-point PDFs are not sufficient to close the absorption term in turbulent flows. The PDF transport Eq. (8) is usually solved using particle Monte Carlo methods, in which the PDF is discretized into a sufficiently large number of “notional” (stochastic) particles, which are traced through the entire domain. Each particle represents a flow realization, so that the instantaneous particle field can be regarded as a snapshot of real flow (Wang and Modest, 2007a). Therefore, a PMC method can be employed to evaluate both the local emission ($\langle 4\pi\kappa_{\eta}I_{b,\eta} \rangle$) and the absorption of incident radiation ($\langle \kappa_{\eta}G_{\eta} \rangle$) exactly without any further modeling assumptions. Emission is fundamentally closed using the one-point PDF and does not require

modeling. Therefore, it is evaluated correctly even when considering optically thin radiation. The PMC model allows accurate determination of both emission and absorption TRI within statistical limits and does not need any other modeling assumptions (such as negligible absorption TRI, etc.). Here, the composition PDF method has been extended to include soot scalars (moments) as part of composition space so that exact turbulent closure is obtained also for the highly nonlinear soot subprocesses. The required mean velocity fields in Eq. (8) are obtained using the standard k - ϵ model.

FLAME CONFIGURATION

A turbulent jet flame studied experimentally by Coppalle and Joyeux (1994) with a jet Reynolds number of 11,800 has been simulated. This flame has been studied numerically by Lindstedt and Louloudi (2005) using optically thin radiation. The effect of reabsorption on temperature predictions and soot yield was left as an open question. In addition, their solution method for scalar transport was a parabolic time-marching scheme, which is not generally extendable to complex configurations. Empirical models were used for all the soot subprocesses including surface growth and oxidation.

Here, an elliptic solution method is employed for scalar transport (including soot moments), which can be easily applied to complex configurations. A weak coflow is used instead of simulating a jet flame into quiescent air, and a small false pilot is employed to stabilize the flame. The jet diameter is $d_j = 4$ mm with fuel velocity of 29.5 m/s. A three-dimensional wedgelike grid system is employed to simulate the axisymmetric flame by applying periodic boundary conditions on the sides, as shown in Fig. 1, with a wedge angle of 10° ; the dimensions in x and z directions are $30d_j$ and $250d_j$, respectively. The grid is fine near the fuel jet to accurately resolve large local gradients in the mixing region and coarser in the coflow air region to save computational time.

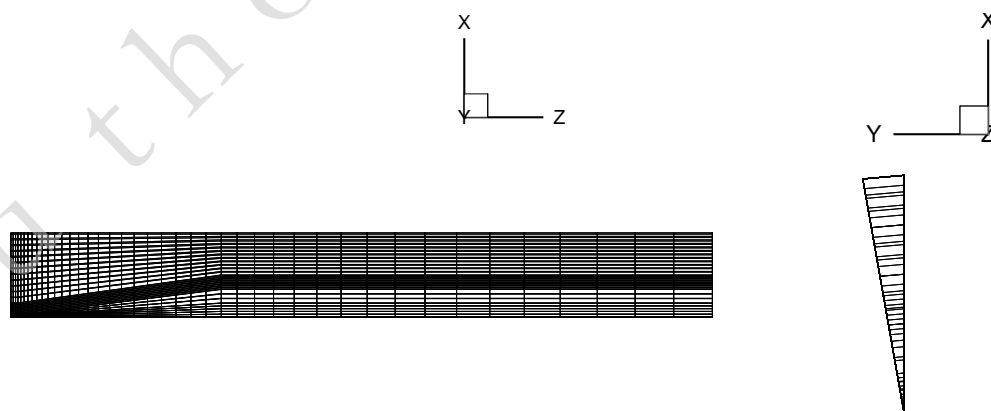


Figure 1. Grid used in simulation.

With composition PDF methods, it is found that ~ 30 particles per cell on average are sufficient to resolve the turbulent fluctuations in the flame.

For radiation, following (Wang and Modest, 2007a) the rays are traced as cones with 1° opening angles and 200,000 rays are traced per time step. Since the flames are statistically stationary, time-averaged radiative source terms evaluated for each cell are fed back to the FV code. In traditional FV methods, the residual error diminishes to zero with sufficient number of iterations and can be used to monitor convergence. However, the residual error in hybrid FV/Monte Carlo method cannot show the same behavior due to presence of statistical noise. Hence, a different metric is generally used to monitor convergence; following the approach of Wang and Modest (2007a), emission-weighted average temperature (T_e), and volume-averaged root-mean-square (rms) fluctuations ($\langle T'' \rangle_v$) are used to monitor convergence, i.e.,

$$T_e = \frac{\int_V k_p T^5 dV}{\int_V k_p T^4 dV} \quad \text{and} \quad \langle T'' \rangle_v = \frac{1}{V} \sum_c \left[\frac{V_c}{\rho_c} \sum_{p \in c} m_p (T_p - T_c)^2 \right]^{1/2} V_c \quad (12)$$

where the outer sum denotes summation over cells, and the inner sum is over particles inside a cell.

RESULTS AND DISCUSSION

The simulations are run in a transient fashion until the convergence criteria are no longer changing with time, using a timestep of $\Delta t = 50 \mu\text{s}$. Convergence results are shown in Fig. 2, using the PMC as RTE solver, but are similar when using the optically thin approximation. Figure 3 shows the converged steady-state contours of the mean temperature and soot volume fraction using the PMC. The contours show reasonable distribution of soot commensurate with the flame structure.

The computed centerline mean temperature profiles obtained without soot radiation, and with soot radiation using either the optically thin approximation or the PMC are shown in Fig. 4. It can be seen that soot radiation has a large effect on the temperatures and, consequently, on the entire flame structure. The peak centerline mean temperature drops by more than 300 K from 1920 K to 1600 K, in the case of optically thin radiation. Thus, optically thin radiation underpredicts peak temperature compared to the experimentally measured value of 1665 K. Optically thin radiation results also underpredict temperatures in most of the downstream region. This fact has important implications on soot formation and oxidation rates, thereby changing the soot profiles. Using the PMC (thus accounting for reabsorption), results in a peak temperature of 1678 K, which is closer to the experimentally reported peak axial value. Therefore, accounting for reabsorption is necessary when modeling sooting flames of this size. An important observa-

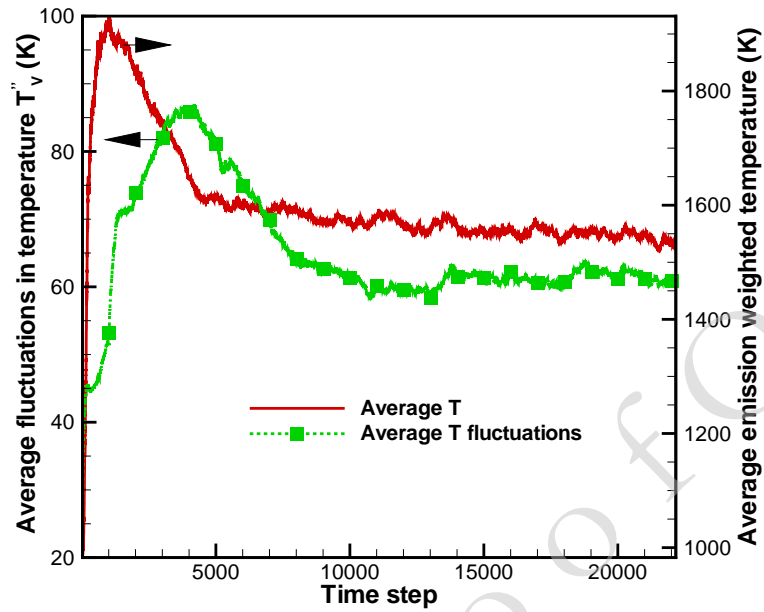


Figure 2. Progress of convergence criteria for PDF/Monte Carlo simulation.

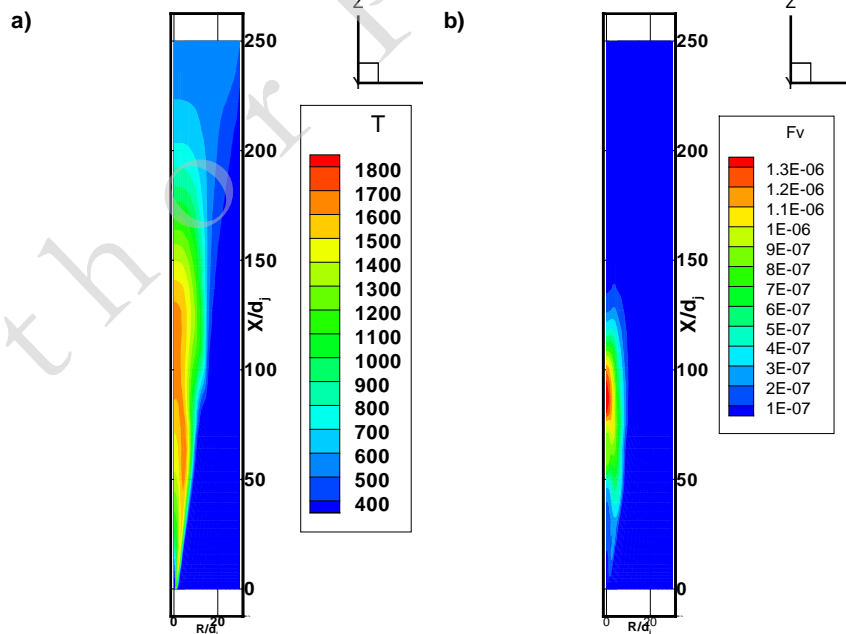


Figure 3. Mean temperature and soot volume fraction contours.

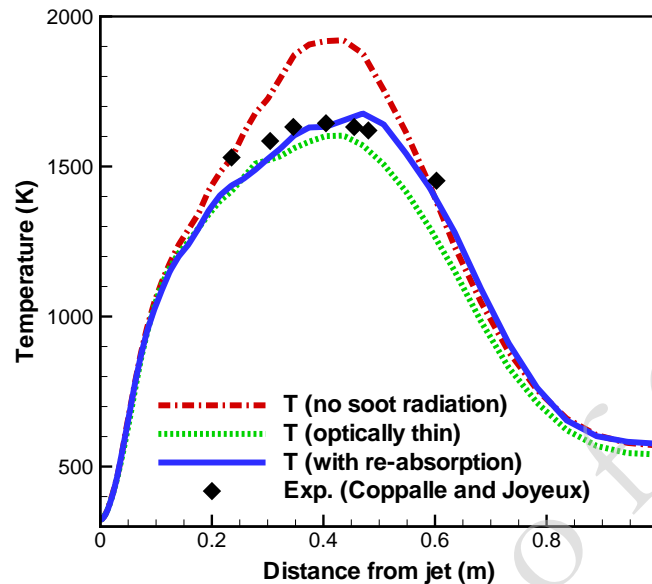


Figure 4. Measured and computed centerline mean temperature profiles using optically thin radiation and PMC method.


tion is that the change in temperature fields affects the soot levels, which in turn affects the amount of heat radiated from the flame.

The global (volume-integrated) emission, absorption, total heat loss and the radiant fraction (compared to chemical heat release) are listed in Table. 2. It can be seen that using the optically thin assumption, results in a higher radiant fraction and relatively low temperatures. With reabsorption, the emission is higher due to higher temperatures, but $\sim 15\%$ of the emitted energy is reabsorbed in the domain. The radiant fraction is high compared to typical values found in nonsooting flames.

The predicted centerline mean soot levels are compared to experiment in Fig. 5. It can be seen that the change in flame structure also affects the soot predictions. The peak axial soot volume fraction is slightly lower than experiments when using both optically thin and PMC models. However, considering the part-per-million levels of soot, the agreement is very encouraging. Reabsorption results in higher temperatures, which increase both surface growth and oxidation rates, and local conditions dictate the net effect on the soot growth rates. In the current flame, accounting for reabsorption results in a higher soot formation rate, giving better agreement with experiments. Radial soot volume fractions at two different stations are shown in Fig. 6. It can be seen that predictions follow the trend of experiments. At both stations optically thin radiation model underpredicts soot to a greater extent than when accounting for reabsorption. Both models are able to capture the off-center peak location reasonably; agreement is better at downstream location compared to upstream.

Table 2. Global emission, absorption and radiant fraction

Description	Total emission (W)	Total absorption (W)	Radiative loss (W)	Radiant fraction (%)
Optically thin	6070	–	6070	28.9
PMC (with re-absorption)	6588	964	5624	26.7

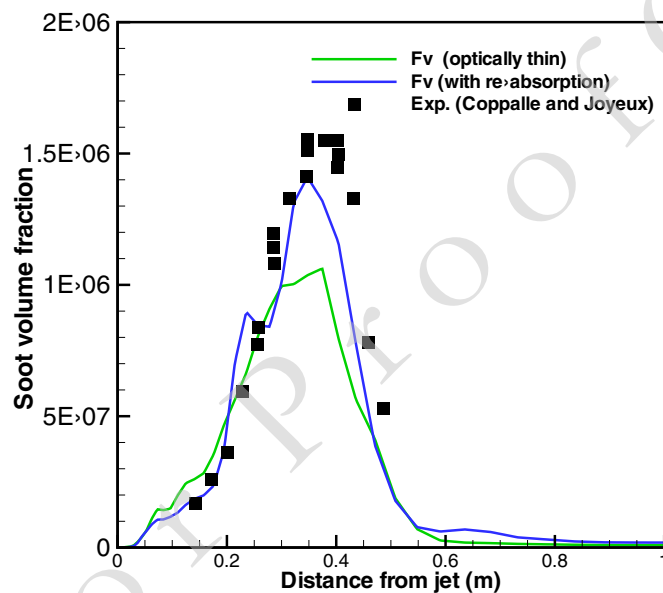**Figure 5.** Measured and computed centerline mean soot volume fraction profiles using optically thin radiation and PMC method.

CONCLUSION

A composition PDF method coupled with a detailed soot model was used to simulate a turbulent ethylene/air jet flame. Detailed radiation calculations were undertaken, using both optically thin radiation (neglecting reabsorption) and with spectral (nongray) photon Monte Carlo method. The effects of using different radiation models were studied based on predicted temperature and soot volume fraction profiles. It was found that accounting for reabsorption is very important in case of sooting flames. Using a composition PDF method to account for TCI accurately along with the PMC method for capturing TRI provides a powerful approach to model turbulent reacting flows, in gen-

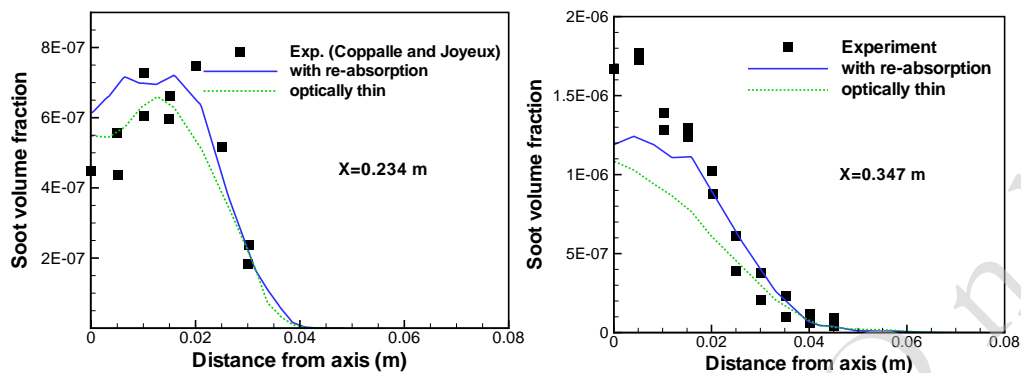


Figure 6. Measured and computed radial soot volume fraction profiles at two axial stations.

eral. The method can be extended to complex configurations and even industrial-scale problems.

Soot predictions are dependent on temperatures and vice versa, and therefore, the exact effects of TRI and TCI on the flame structure cannot be separated. Separation of the relative importance of emission TRI and absorption TRI in sooting flames has also not been undertaken. These are topics of ongoing research.

ACKNOWLEDGMENT

This work was supported by NASA under Grant No. NNX07AB40A.

REFERENCES

- Appel, J., Bockhorn, H., and Frenklach, M., Kinetic modeling of soot formation with detailed chemistry and physics: Laminar premixed flames of C_2 hydrocarbons, *Combust. Flame*. vol. 121, pp. 122–136, 2000.
- Bandaru, R. V., Experimental studies of the emission characteristics of nonpremixed gas-air flames of various configurations, PhD thesis, The Pennsylvania State University, University Park, 2001.
- Bockhorn, H., *Soot Formation in Combustion*, Springer-Verlag, New York, 1994.
- Chang, H. and Charalampopoulos, T. T., Determination of the wavelength dependence of refractive indices of flame soot, *Proc. R. Soc. (London) A*. vol. 430, pp. 577–591, 1990.
- Coelho, P. J., Numerical simulation of the interaction between turbulence and radiation in reactive flows, *Prog. Energy Combust. Sci.* vol. 33, pp. 311–383, 2007.
- Coelho, P. J., Teerling, O. J., and Roekaerts, D., Spectral radiative effects and turbu-

- lence/radiation interaction in a non-luminous turbulent jet diffusion flame, *Combust. Flame*. vol. 133, pp. 75–91, 2003.
- Colket, M. B. and Hall, R. J., Successes and uncertainties in modeling soot formation in laminar, premixed flames, ~~xxx~~, H. Bockhorn, ed., *Soot Formation in Combustion: Mechanisms and Models*, Springer-Verlag, New York, 1994.
- Coppalle, A. and Joyeux, D., Temperature and soot volume fraction in turbulent diffusion flames: Measurements of mean and fluctuating values, *Combust. Flame*. vol. 96, pp. 275–285, 1994.
- Cox, G., On radiant heat transfer from turbulent flames, *Combust. Sci. Technol.* vol. 17, pp. 75–78, 1977.
- Faeth, G. M., Gore, J. P., Chuech, S. G., and Jeng, S. M., Radiation from turbulent diffusion flames, *Annual Review of Numerical Fluid Mechanics and Heat Transfer*, Vol. 2, Hemisphere, Washington, DC, pp. 1–38, 1989.
- Frenklach, M., Method of moments with interpolative closure, *Chem. Eng. Sci.* vol. 57, pp. 2229–2239, 2002.
- Frenklach, M. and Wang, H., Detailed modeling of soot particle nucleation and growth, *Proc. Combust. Inst.* vol. 23, pp. 1559–1566, 1991.
- Frenklach, M. and Wang, H., Detailed mechanism and modeling of soot particle formation, H. Bockhorn, ed., *Soot Formation in Combustion: Mechanisms and Models*, Springer-Verlag, New York, 1994.
- Fuchs, N. A., *The Mechanics of Aerosols*, Dover Publ., New York, 1989.
- Harris, S. J. and Weiner, A. M., Chemical kinetics of soot particle growth, *Ann. Rev. Phys. Chem.* vol. 36, pp. 31–52, 1985.
- Janicka, J., Kolbe, W., and Kollmann, W., The solution of a PDF-transport equation for turbulent diffusion flames, *Proc. of 1978 Heat Trans. Fluid Mech. Inst.*, Stanford University, 1978.
- Jenny, P., Pope, S. B., Muradoglu, M., and Caughey, D. A., A hybrid algorithm for the joint PDF equation of turbulent reactive flows, *J. Comp. Phys.* vol. 166, pp. 218–252, 2001.
- Kazakov, A. and Frenklach, M., Dynamic modeling of soot particle coagulation and aggregation: Implementation with the method of moments and application to high-pressure laminar premixed flames, *Combust. Flame*. vol. 114, pp. 484–501, 1998.
- Kee, R. J., Dixon-Lewis, G., Warnatz, J., Coltrin, M. E., and Miller, J. A., A computer code package for evaluation of gas-phase, multicomponent transport properties, Tech. Report No. SAND86-8246, Sandia National Laboratory, 1986.
- Kee, R. J., Rupley, F. M., and Miller, J. A., CHEMKIN-ii: A Fortran chemical kinetics package for the analysis of gas-phase chemical kinetics, Tech. Report No. SAND89-8009B, Sandia National Laboratories, 1989.
- Kennedy, I. M., Models of soot formation and oxidation, *Prog. Energy Combust. Sci.* vol. 23, pp. 95–132, 1997.

- Law, C. K., Comprehensive description of chemistry in combustion modeling, *Combust. Sci. Technol.* vol. 177, pp. 845–870, 2005.
- Leung, K. M., Lindstedt, R. P., and Jones, W. P., A simplified reaction mechanism for soot formation in nonpremixed flames, *Combust. Flame*. vol. 87, pp. 289–305, 1991.
- Modest, M. F., Application of composition pdf methods in the investigation of turbulence–radiation interactions, *J. Quant. Spectrosc. Radiat. Transfer*, vol. 73, pp. 461–472, 2002.
- Lindstedt, R. P. and Louloudi, S. A., Joint-scalar transported pdf modeling of soot formation and oxidation, *Proc. Combust. Inst.*, vol. 30, pp. 775–783, 2005.
- Mazumder, S. and Modest, M. F., A PDF approach to modeling turbulence–radiation interactions in nonluminous flames, *Int. J. Heat Mass Transfer*, vol. 42, pp. 971–991, 1999.
- McEnally, C., Schaffer, A., Long, M., Pfefferle, L., Smooke, M., Colket, M., and Hall, R., Computational and experimental study of soot formation in a coflow, laminar ethylene diffusion flame, *Proc. Combust. Inst.*, vol. 27, pp. 1497–1505, 1998.
- Mehta, R. S., Haworth, D. C., and Modest, M. F. 2007, Composition pdf/method of moments modeling of soot formation in a turbulent ethylene/air jet flame, Fall Meeting, ESSCI, Charlottesville, VA, Oct, 21–24, 2007.
- Mehta, R. S., Haworth, D. C., and Modest, M. F., An assessment of gas-phase thermochemistry and soot models for laminar atmospheric-pressure ethylene-air flames, *Proc. Combust. Inst.*, (submitted), 2008.
- Modest, M. F., *Radiative Heat Transfer*, 2nd edn, Academic Press, New York, 2003.
- Muradoglu, M., Jenny, P., Pope, S. B., and Caughey, D. A., A consistent hybrid finite volume/particle method for the PDF equations of turbulent reactive flows, *J. Comp. Phys.*, vol. 154, pp. 342–371, 1999.
- Muradoglu, M., Pope, S. B., and Caughey, D., The hybrid method for the pdf equations of turbulent reactive flows: Consistency conditions and correction algorithm, *J. Comp. Phys.*, vol. 172, pp. 841–878, 2001.
- Neoh, K. G., Howard, J. B., and Sarofim, A. F., xxx, S. D.C. G. Smith, eds., *Particulate Carbon: Formation During Combustion*, Plenum, New York, p. 261, 1981.
- Pope, S. B., PDF methods for turbulent reactive flows, *Prog. Energy Combust. Sci.*, vol. 11, pp. 119–192, 1985.
- Seinfeld, J. H. and Pandis, S. N., *Atmospheric Chemistry and Physics: From Air Pollution to Climate Change*, Wiley, Hoboken, NJ, 1998.
- Snegirev, A. Y., Statistical modeling of thermal radiation transfer in buoyant turbulent diffusion flames, *Combust. Flame*, vol. 136, pp. 51–71, 2004.
- Song, T. H. and Viskanta, R., Interaction of radiation with turbulence: Application to a combustion system, *J. Thermoph. Heat Transfer*, vol. 1, pp. 56–62, 1987.
- Subramaniam, S. and Pope, S. B., A mixing model for turbulent reactive flows based on euclidean minimum spanning trees, *Combust. Flame*, vol. 115, pp. 487–514, 1998.

- Subramaniam, S. V. and Haworth, D. C., A PDF method for turbulent mixing and combustion on three-dimensional unstructured deforming meshes, *Int. J. Engine Res.*, vol. 1, pp. 171–190, 2000.
- Tessé, L., Dupoirieux, F., and Taine, J., Monte carlo modeling of radiative transfer in a turbulent sooty flame, *Int. J. Heat Mass Transfer*, vol. 47, pp. 555–572, 2004.
- Veynante, D. and Vervisch, L., Turbulent combustion modeling, *Prog. Energy Combust. Sci.*, vol. 28, pp. 193–266, 2002.
- Wang, A. and Modest, M. F., Monte carlo simulation of radiative heat transfer and turbulence interactions in methane/air jet flames, *J. Quant. Spectrosc. Radiat. Transfer*, vol. 109, pp. 269–279, 2007a.
- Wang, A. and Modest, M. F., Spectral monte carlo models for nongray radiation analyses in inhomogeneous participating media, *Int. J. Heat Mass Transfer*, vol. 50, pp. 3877–3889, 2007b.
- Wang, H., Du, D. X., Sung, C. J., and Law, C. K., Experiments and numerical simulation on soot formation in opposed-jet ethylene diffusion flames, *Proc. Combust. Inst.*, vol. 26, pp. 2359–2368, 1996.
- Xu, J. and Pope, S. B., Assessment of numerical accuracy of PDF/Monte Carlo methods for turbulent reacting flows, *J. Comp. Phys.*, vol. 152, pp. 192–230, 1999.
- Zhang, Y. Z. and Haworth, D. C., A general mass consistency algorithm for hybrid particle/finite-volume pdf methods, *J. Comp. Phys.*, vol. 194, pp. 156–193, 2004.